


## V20 Hyper Light Tower

The **V20 Hyper** is a new mobile lighting tower equipped with 4 x320W highly efficient floodlights. It provides more than 140 hours of run time and delivers one of the lowest sound pressure levels in the industry- only 58 dB(A) at 7m. The exclusive Hyper version, with **Omnia® LED Technology**, allows the operator to point the floodlights in every direction to provide 360 illumination and are available with anti-glare options.

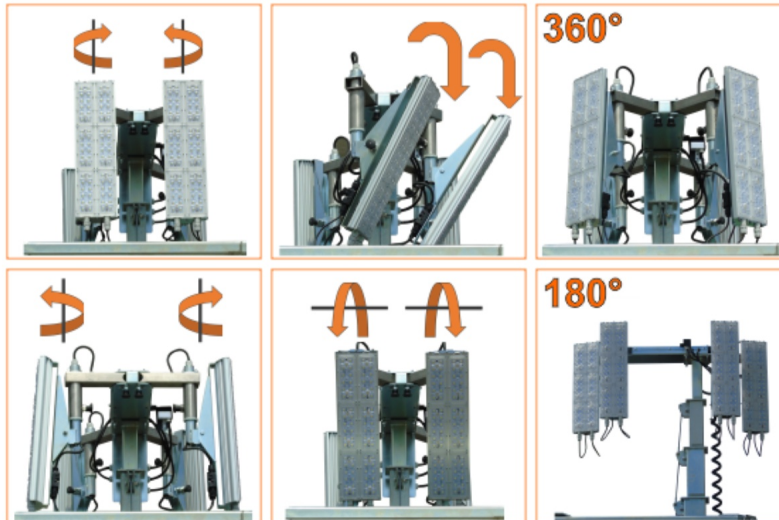

Picture shown may not reflect actual configuration.

## GTL01 digital controller

The V20 HYPER is equipped with a **GTL01 digital controller** specifically studied to manage every function of the light tower for the best ease of use.

## Top accessibility

3 doors for a wider access. 2 compass-top doors with «wing» shape provide a complete access to the engine for a safe and convenient maintenance. 1 back door allows the access to the digital control panel.

## The lowest noise level!

Innovation means also **decreasing the noise level!** The V20 light tower emits only 58 dB(A) @ 7 meters.

## Long running time

Thanks to the V20 HYPER's fuel saving features such as the small engine and the LED lamps, this model can **run up to 143 hours** without refueling.

## Double power

You can connect a V20 HYPER to another V20 HYPER and run two lighting towers with only one engine.

V20 HYPER K2	Technical Data
Minimum dimensions (L x W x H)	2200 x 1400 x 2440 mm
Maximum dimensions (L x W x H)	2200 x 1850 x 8500 mm
Dry weight	980 kg
Lifting system	Hydraulic
Mast rotation	340°
Lamps power	4 x 320 W
Lamps type	LED (Hyper)
Total lumen	184000 Lm
Illuminated area (180°/360°)	4500/4200 m <sup>2</sup>
Engine	Kubota Z482
Engine cooling	Liquid
Cylinders (q.ty)	2
Engine speed (50/60 Hz)	1500 / 1800 rpm
Liquid containment (110%)	√
Alternator (kVA/V/Hz)	5/220/50 – 5/240/60
Outlet socket (kVA/V/Hz)	2/220/50 – 2/240/60
Inlet plug (A/V/Hz)	16/220/50 – 16/240/60
Avg. sound pressure	58 dB(A) @ 7m
Wind speed resistance	110 km/h
Tank capacity	100 l
Running time	143 h



Picture shown may not reflect actual configuration.

**AFTER-SALES SERVICE:**

[daniele.crepaldi@generac.com](mailto:daniele.crepaldi@generac.com)

[fabio.busato@generac.com](mailto:fabio.busato@generac.com)

**SPARE PARTS:**

[manuela.mariani@generac.com](mailto:manuela.mariani@generac.com)

**TUTORIALS:**

[www.towerlight.com/qr/](http://www.towerlight.com/qr/)